





COMPOSITION

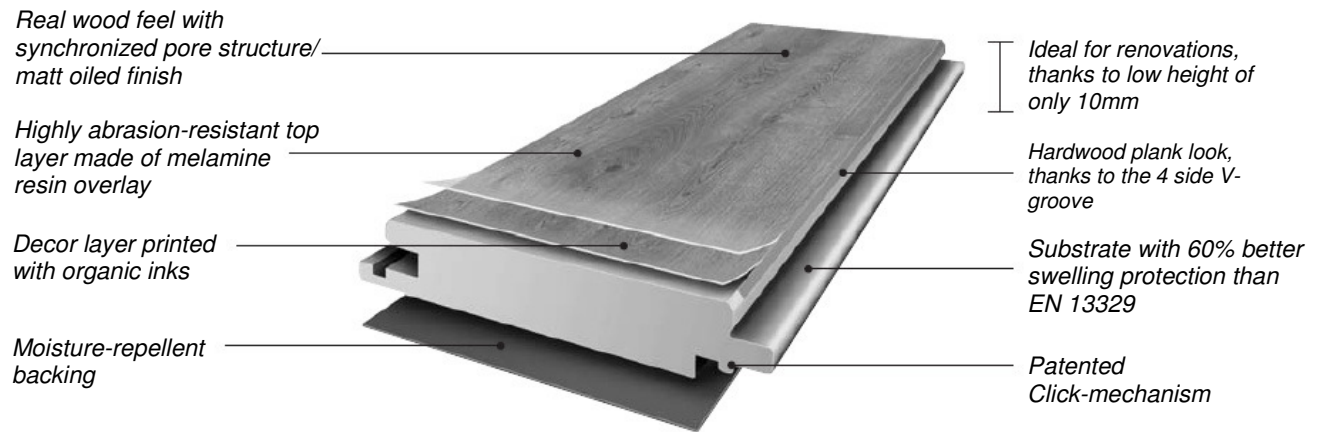

SPECIFICATIONS

BRAND	KAINDL ONE 10.0 mm NARROW PLANKS	
PLANK SIZE	1380 x 116 x 10 mm	
CORE BOARD	Direct pressure laminate substrate: Low swelling HDF core board, E1	
TOP FACE	Highly resistant surface with corundum Al ₂ O ₃ + soaked with melamine resins	
BACK FACE	Melamine soaked balancing layer	
LOC SYSTEM	Kaindl Loc Glueless installation system having a locking strength of 800 - 900 kgs/ linear mtr	
THICKNESS SWELLING	< 18% according to EN 13329;	< 12% according to EN 317
ABRASION CLASS	AC 4 / 32	
IMPACT CLASSIFICATION	IC 2	
DECOR	As seen in sample kit	
BENEFITS	<p>Narrow planks for a trendy look</p> <p>High moisture protection</p> <p>High structural strength</p> <p>Extra strong lock system - tighter joints</p> <p>Enhanced floor life</p>	
GUARANTEE	<p>30 years guarantee*</p> <p><i>* as per Kaindl's original quality guarantee</i></p>	
SPECIAL FEATURE	Synchronized pore structure/ matt oiled texture for an authentic feel	



Span Floors Pvt. Ltd.

25/35, Punjabi Bagh West

New Delhi – 110026

INDIA

Tel: +91-11-25220033, 25223032,

25221991, 64541701 & 64554705

Fax: +91-11-25221990

Email: floors@spanfloors.com

Website: www.spanfloors.com